
IN251000309V02_UK

B31-638V70



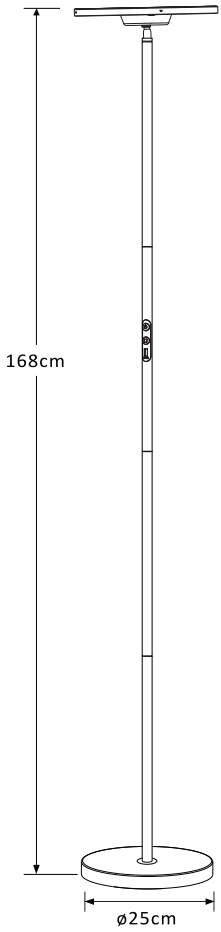

Smart floor lamp

IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY.



EN

LED floor lamp user manual

Thank you for your choice. Please read the user manual carefully and keep it for further reference.

Please follow the instruction step by step. After installation, this LED floor lamp can be controlled by remote controller or touch button on the lamp.

Package List

		
A. lamp x 1	B. Remote Control x 1	C. Base x 1
		
		D. Power Adapter with Cable x 1

Specification

Model	(B31-638V70BK)(LDD-25W-D)
Dimension	ø25xH168cm
Input Voltage	100-240V AC,50/60Hz
Color Temperature	2700K-6000K+RGB
Power	30W
Controlled By	Remote/Touch/APP
Dimmable	YES
Material	Iron+PC

EN

Installation


Step 1: Push the wire out of the tube and then screw it into the lamp head with the tube


Step 2: Connect the tube to the lamp head by clockwise.

Step 3: Connect the tube to the other tubes by clockwise.


Step 4: Finally connect the tube to the lamp base by clockwise.

After the installation is finished, plug in adapter, then you can touch control, or remote control the light.



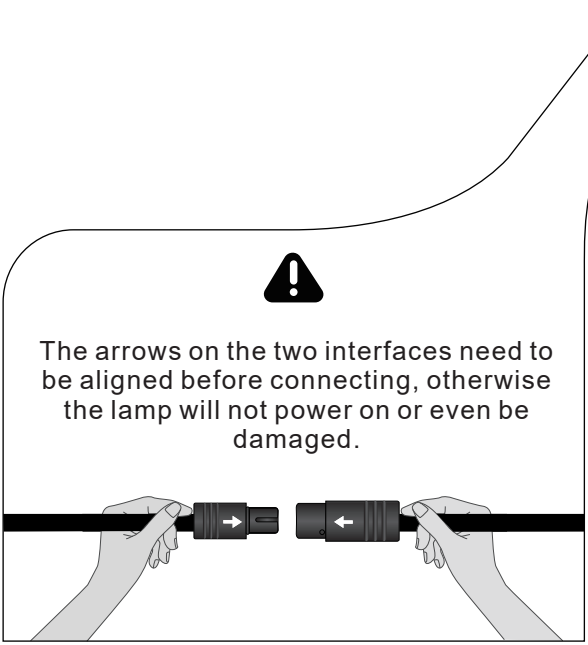


EN

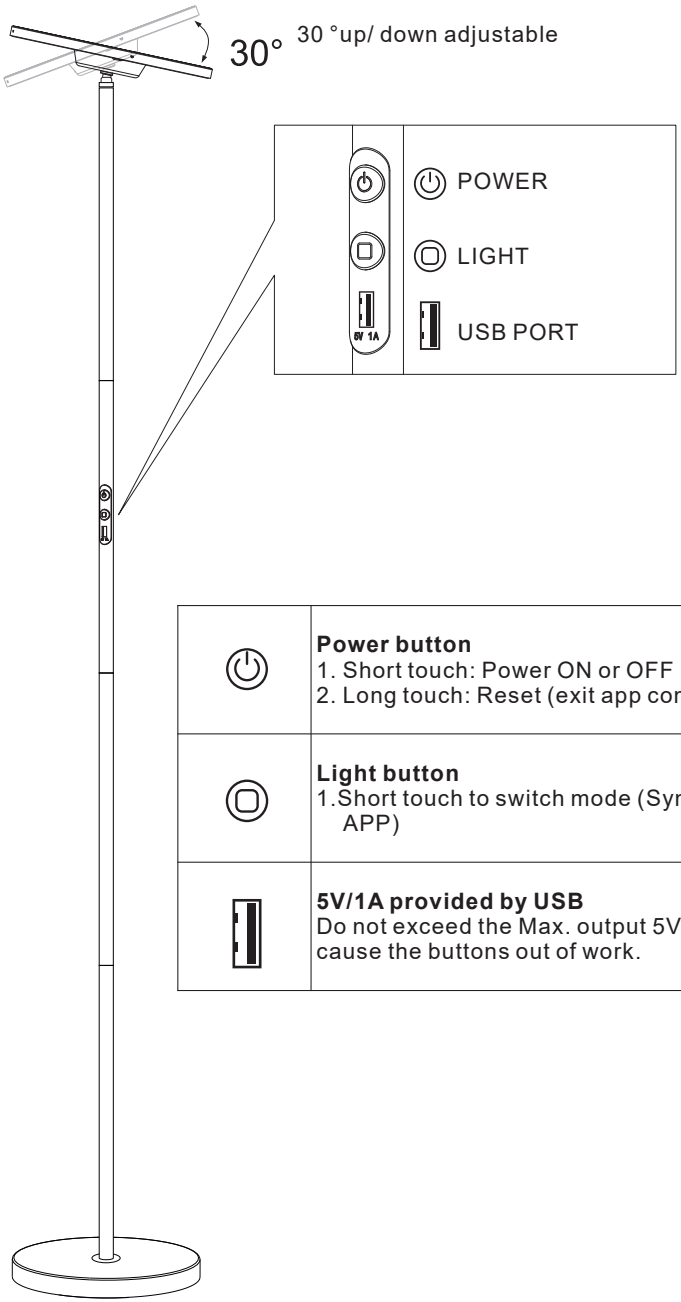

	Power button 1. Short touch: Power ON or OFF 2. Long touch: Reset (exit app connection)
	Light button 1.Short touch to switch mode (Synchronize with APP)
	5V/1A provided by USB Do not exceed the Max. output 5V/1A, or it will cause the buttons out of work.

EN

Remore Control

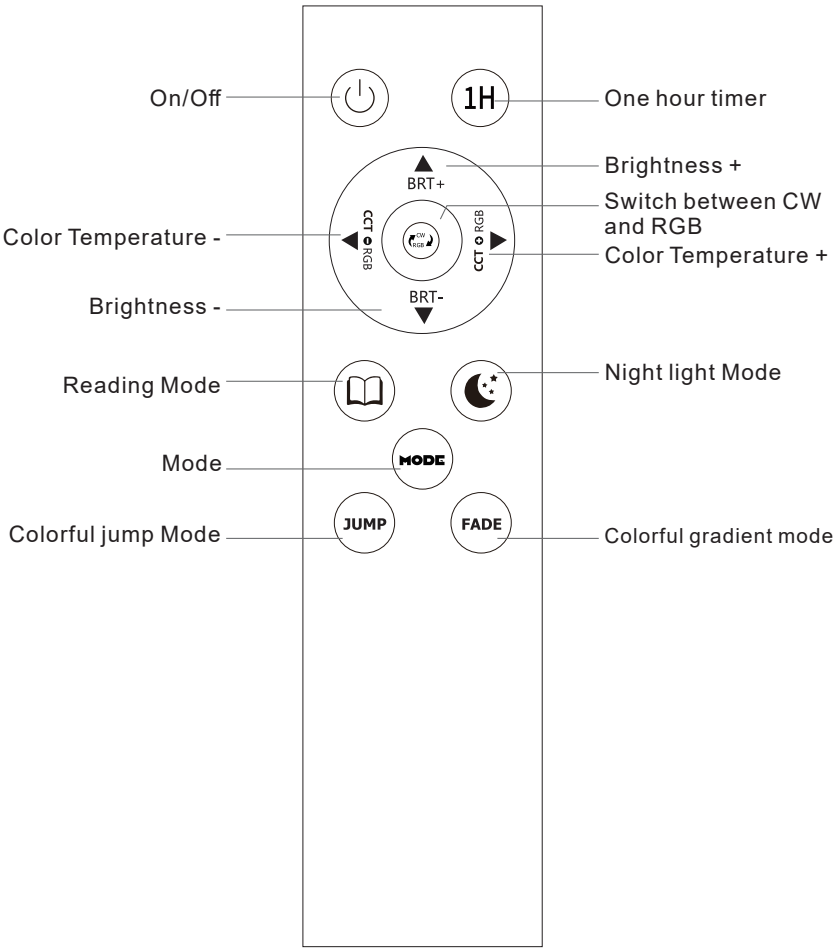

EN


Button	
on/off	on/off
1H One hour timer	Short press: Activates the one-hour timer function.The light wil flash once as a prompt to indicate successfur timing. Note: Press any button to cancel the timer function and then press the timer button to restart the timer for 1 hour
▲ BRT+ Brightness +	Short press: Increases brightness in 6 levels Long press: Steplessly increases brightness.
BRT- ▼ Brightness -	Short press: Decreases brightness in 6 levels Long press: Steplessly decreases brightness.
◀ CCT ⊙ RGB Color temperature -	In CW state: Short press:Decreases color temperature in 6 steps: 6000K-2700K. Long press: Steplessly decreases color temperature In RGB state: Short press: Cycles through light blue, purple, yellow, blue, green, and red.
CCT ⊙ RGB ▶ Color temperature +	In CW state: Short press: Increases color temperature in 6 steps: 2700K-6000K. Long press: Steplessl yincreases color temperature. In RGB state: Short press: Cycles through red, green. blue, yellow, purple, and light blue.
CW RGB Switch between CW and RGB	Short press: Switches between RGB and CW control.
Reading mode	Reading mode
Night light mode	Night light mode
MODE mode	8 modes (Synchronize with APP)
JUMP Colorful jump Mode	Colorful jump Mode
FADE Colorful gradient mode	Colorful gradient mode


EN

Use Tips On Remote Control

- The remote control distance is within 49.2ft.
- The remote controller requires two AAA batteries. (not included)
- Pairing is not required before using.
- The back of the remote controller is magnetic and can be attached to a floor lamp pole or any other metal object.
- If the remote control fails to work, please re-pair the remote and lamp with the following methods:

1. Disconnect the power supply for more than 10 seconds.
2. Connect the power supply.
3. Press and hold button " (1H) "on the remote control within 5 seconds after power on.
4. When the red light flashes one time, it matched successfully.

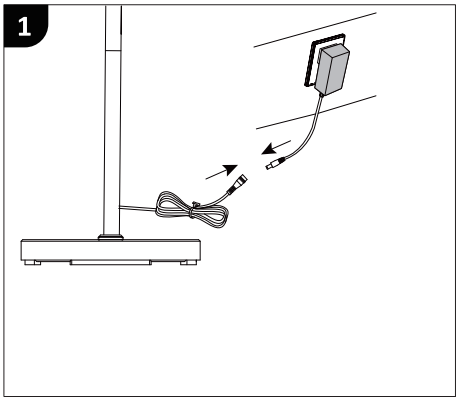

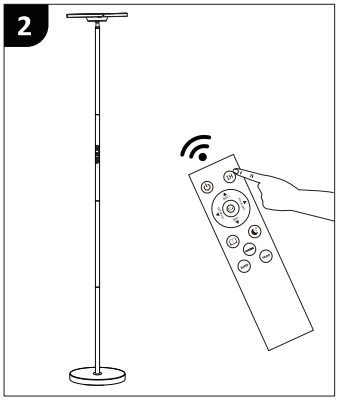

- There is a magnet on the back of the remote controller, which can be adsorbed on any iron metal surface such as floor lamp pole.

EN

How to pair the floor lamp to 'smart Life' APP.

Step A: Please download the APP by scanning the following code or simply search keywords 'Smart Life' in the APP Store or Google Play.


Step B: Pair the floor lamp to 'Smart Life' APP.

1. Enable Bluetooth and Network settings on your mobile device.





EN


2. Plug and unplug the Dc head 3 times (ON/OFF/ON/OFF/ON), and the device will flash to indicate that it is ready for network connection.

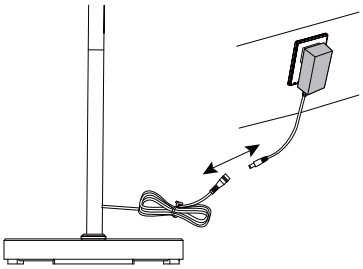



3. Go to 'Smart Life' APP and login with your account details. Click '+' on the upper right corner to add device. Click 'smart RGBCW Floor Lamp'. Waiting till the pairing process complete.







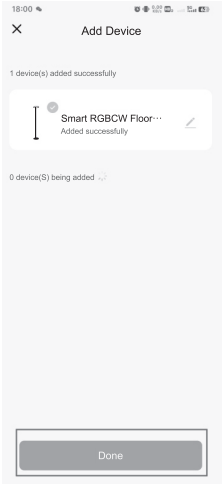

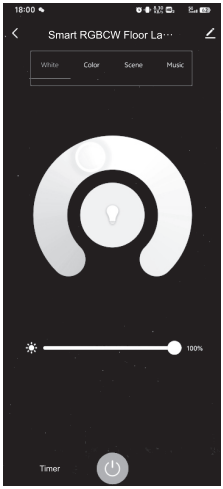

4. The Smart RGBCW Floor Lamp will be shown on the app homepage. Now you can control the light (turn on/off, change colors, adjust brightness etc.)

EN

CAUTION

- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- Do not connect the chain to the supply while it is in the packaging.
-  **INDOOR USE ONLY**
- Keep out of reach of children and animals.
- Do not use in the bathroom or damp places.
- Place the lamp on a flat surface and ensure it is placed away from any flammable materials.
- Before cleaning the lamp, ensure it is switched off.
- Do not pull the plug out of the socket with wet hands.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- Do not touch light bulb while fixture is turned on.
- Never look directly at a lit bulb.
- **Notice: Do not repeatedly turning the light on and off.**

WARNING

- Please cut off the power before installation or cleaning it.
- Keep it away from flammables and fire source.
- Lamp is not waterproof.
- Assemble the lamp according to the instructions and do not remodel it.
- Do not stare at the light for a long time.
- Assemble, take apart or move the lamp gently.
- Do not place it near little children.

CARE INSTRUCTIONS:

- Unplug lamp before cleaning.
- Wipe clean with a soft, dry cloth or static duster.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.

UK

If you have any questions, please contact our customer care center.
Our contact details are below:



0044-800-240-4004



enquiries@mhstar.co.uk

IMPORTER ADDRESS:
MH STAR UK LTD
Unit 27, Perivale Park,
Horsenden lane South
Perivale, UB6 7RH
MADE IN CHINA

Aosom